



DIMENSIONS

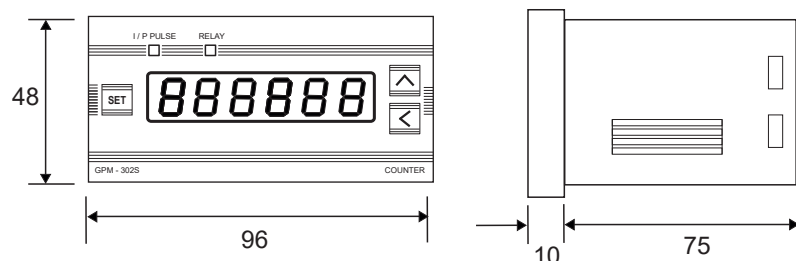

PANEL CUTOUT DIMENSION



All dimensions are in mm

SPECIFICATIONS

Range	999 999 Counts
Display	Six digits, 0.4 Inch seven segment LED
Reset	Manual
Input	NPN (or) PNP Proximity unit (Selectable)
Pulse frequency	Low : Less than 30 Hz & High : More than 30 Hz
Special feature	Memory Retention
Indications	Input Pulse LED
User programming	3 Keys & Display
Count direction	Up
Power consumption	4.8 VA
Supply voltage	100 - 240 V AC, 50HZ
Operating voltage range	+ / -10% from the rated voltage
Weight	170 grams
Dimension (L x W x D)	96 x 48 x 75
Ambient humidity	35 to 85 % RH
Ambient temperature	-10 to 55 °C
Storage temperature	-25 to 65 °C
In the pack	Counter, side clamp and instruction manual

GPM - 302S SIMPLE COUNTER

GREEN
COMPONENTS FOR AUTOMATION

INTRODUCTION

Thank you very much for purchasing this GREEN product GPM-302S. Please read the instruction manual carefully for the full usage of this product

The COUNTER has passed various quality tests before despatch. Please check however, at the time of arrival, its model code and its appearance and ensure that all the contents are provided and there are no faults, damage etc, to the timer. Please also ensure that the model code, which is labeled on the timer, is identical to the one you ordered.


NOTE:

- Our company shall not be liable for any damages, as described below, caused to both any users and third parties
 - Damages caused by the result of operation of the product.
 - Damages caused by any defects in the product which are unpredictable for us.
- The content in this manual are subject to change without any notice. If you have any suggestion on the matter, Please do not hesitate to contact us.

PRECAUTION FOR SAFE USE

- Use and store the Timer within the specified ambient temperature and humidity ranges.
- Do not use the product in location subject to vibrations or shocks. Using the product in such location over a long period may result in damage due to stress.
- Do not use the product in locations subject to dust, corrosive gases, or direct sunlight
- Separate the input signal devices, input signal cables and the product from the source of noise or high - tension cables producing noise
- The supplied power voltage and load must be within the rated and specified ranges.
- Do not use where the water or oil splatter on the Timer
- Install a switch or circuit breaker that allows the operator to immediately turn off the power

WIRING DIAGRAM

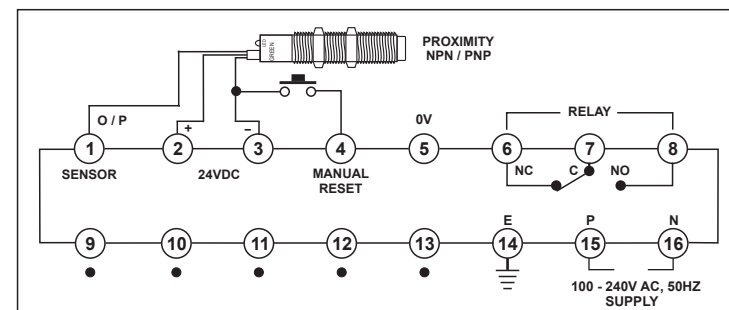

MANUFACTURER

GREEN MICROELECTRONICS INDIA PVT. LTD.

green@greenelectronics.in


www.greenelectronics.in

0422-2590288

■ OPERATION PROCEDURE :

Press **SET** before Power ON for PARAMETER SELECTION / TO RESET COUNT

■ PARAMETER SELECTION

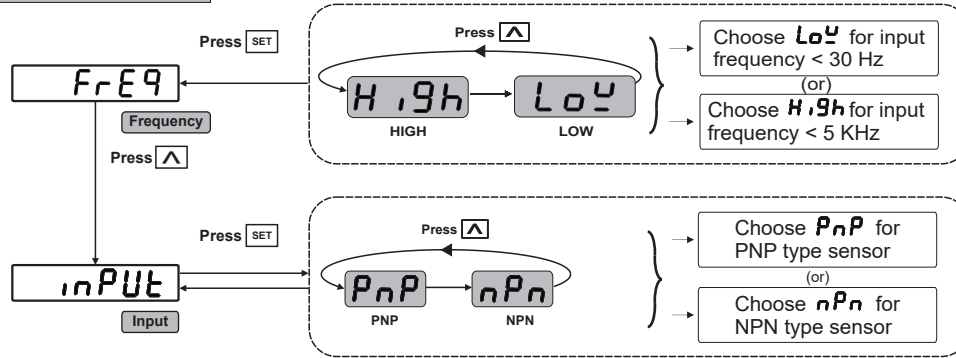


■ COUNT RESET

Press **Δ ⊕ ⊞** for 2sec to Reset the TOTAL & 10 LAC COUNTS

FrE9 → inPUt → []

■ OPERATION LEVEL:

Power ON

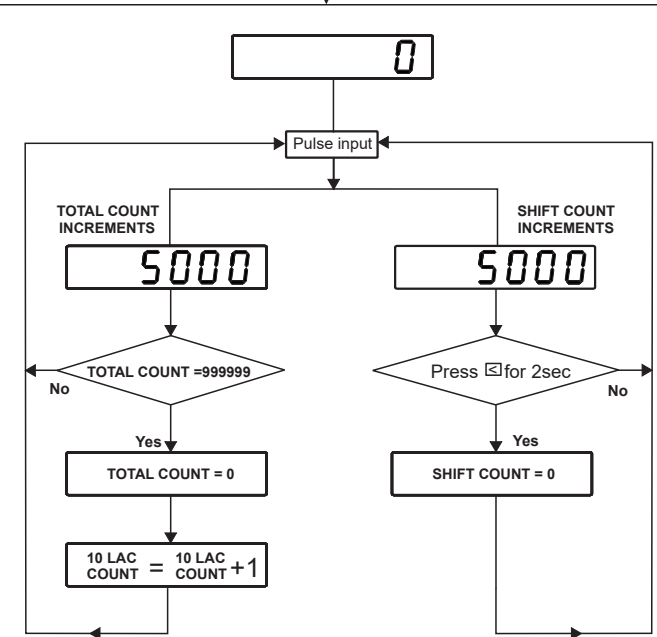

■ TOTAL / 10 LAC / SHIFT COUNT SELECTION

